JETSTREAM PRO

CERASYNC-SS

PERFORMANCE STARTS WITH STABILITY



ALL-WEATHER HIGH-PERFORMANCE HEADSET BEARING

CERASYNC-SS delivers a stable steering foundation through a synchronized hybrid system of ceramic and stainless steel balls. Low friction meets structural strength, ensuring smooth, precise handling in all conditions.

Constructed with 440C stainless steel races, it resists moisture, corrosion, and wear—maintaining performance through rain, sweat, and repeated use. Stable.Consistent. Race-ready.



Stainless Steel Race

Built with 440C stainless steel inner and outer races, this bearing delivers outstanding corrosion resistance and all-weather durability. It maintains structural integrity and smooth rotation under humidity, rain, and sweat exposure, reducing corrosion-related wear and extending bearing lifespan for consistent, long-term performance.



Hybrid Ball Architecture

CERASYNC-SS utilizes a synchronized hybrid configuration of ceramic and stainless steel balls, combining the low friction and high-speed efficiency of ceramic with the corrosion resistance and structural stability of stainless steel. This balanced architecture ensures smooth rotation, durability, and consistent performance in demanding and wet riding conditions.



G5 Ceramic Balls

The ceramic bearings utilize G5-grade ceramic balls and are paired with precisely machined steel race, delivering excellent rotational performance for riders.




JETSTREAM PRO

Jetstream Pro Series stands for Rotation Optimized Ceramic Technologies. Because it takes more than just ceramic balls to minimize friction and gain watts. It´s about the composition of race, seal, lubricant and balls. Jetstream Pro Series delivers the right composition for the purpose. The JetStream Pro series offers exceptional efficiency and durability, backed by a reassuring four-year warranty for users.

CERASYNC SS SUPERIOR WEATHER RESISTANCE

72H NSS SALT SPRAY TEST COMPARISON (SGS)

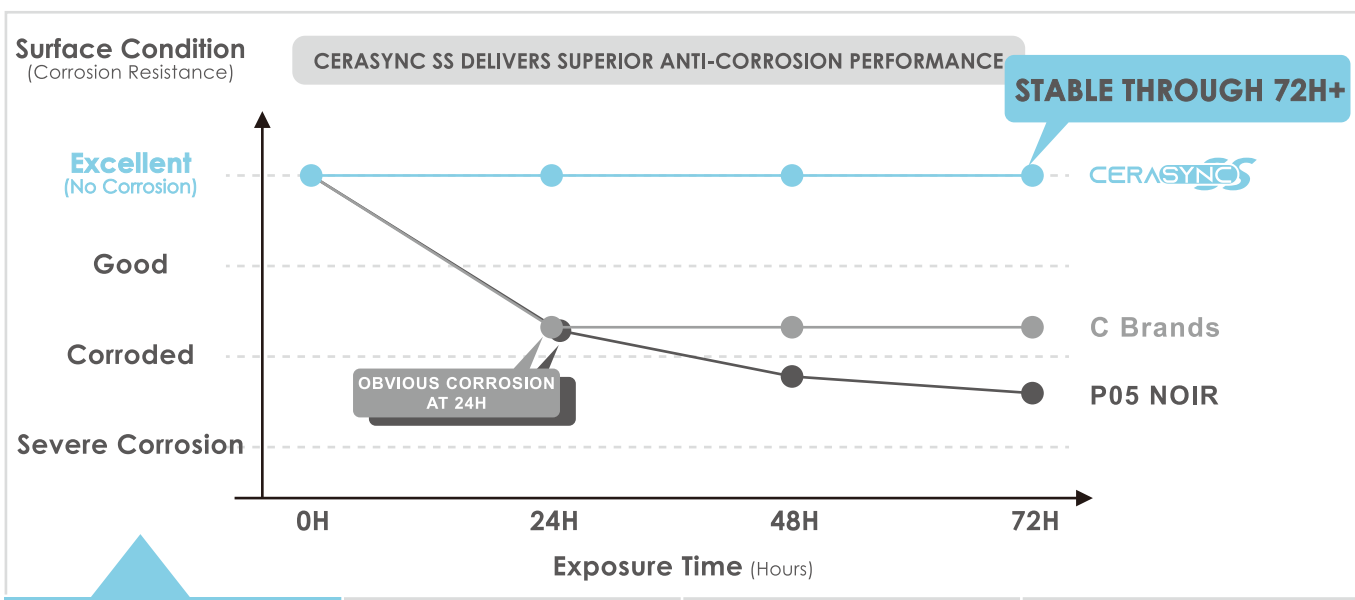

TEST CONDITIONS	5% NaCl Solution (Concentration)	35±2°C (Temperature)	No Pre-cleaning (As Received)

Spec:

ID	OD	H	A1 A2
27.1	38.0	6.5	36 / 45
30.1	41.1	6.5	36 / 45
30.1	41.1	6.5	45 / 45
30.1	41.8	6.5	45 / 45
30.5	41.8	8.0	45 / 45
30.5	41.8	8.0F	45 / 45
34.1	46.9	7.0	45 / 45
35.0	44.0	5.5	36 / 45
35.0	47.0	7.0	36 / 45
37.0	46.9	7.0	45 / 45
37.0	49.0	7.0	45 / 45
40.0	51.0	6.5	36 / 45
40.0	51.8	8.0	36 / 45
40.0	51.8	8.0	45 / 45
40.0	51.9	8.0	36 / 45
40.0	51.9	8.0	45 / 45
40.0	52.0	6.5	36 / 45
40.0	52.0	7.0	45 / 45
40.5	49.5	6.5	45 / 45
42.0	51.8	7.0	45 / 45
42.0	52.0	7.0	45 / 45

I.D. with small lip

True performance is not defined by peak speed alone.
It is built on control, consistency, and reliability under high loads, long distances, and real-world conditions.

Jetstream PRO CERASYNC-SS is engineered to be the stable foundation of competitive steering performance.



TRiPEAK CERAMIC SPECIALIST
886-4-2463-6319
info@tripeakbearing.com